

No. 1234
or 1235


INSTRUCTIONS

Water need not be turned off.


- 1 Remove Screws and pull
Handles forward to remove.

- 3 Pull out to remove Hose Assy.
from Cover.

- 2 Unscrew largest Knurled Rings
& pull Large Chrome Cover
Forward to remove.

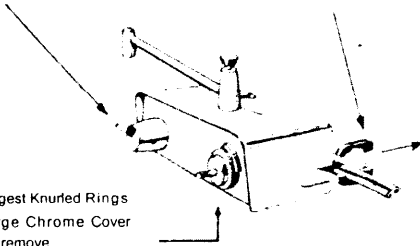

- 4 Pull to remove Clear Plastic Tube
from Hose and Tank. With
Spout pointing straight forward,
lift Tank up to remove.



- 5 Wash Detergent Tank out
thoroughly.

- 6 Unscrew Hex Nut to remove Hose
from Unit

7. Install new 'A' Assy. and re-assemble Unit by reversing above steps.

Note: Follow Step No.11 on page 2 of your Service Manual for
correct setting of Valve Handles